

CERTIFICATE OF CONSTANCY OF PERFORMANCE

Issued by DBI Certification, notified body No. 2531.

In compliance with *Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011* (the Construction Products Regulation or CPR), this certificate applies to the construction product

Gallow Type LG

Scope: Fixed vertical road traffic signs (ZA.6)

The product fulfils the essential characteristic:

See Annex 1

Intended use: Complete assemblies of fixed vertical road traffic signs.
The signs and gallows are intended for mounting at ground level

Placed on the market under the name or trade mark of:
Infra Group Danmark ApS
Højgårdsvej 11
5750 Ringe
Denmark

and produced in the manufacturing plant:
CPA30005

This attests that all provisions concerning the performance described in Annex ZA of the standard(s)

EN 12899-1:2007 : **Fixed, vertical road traffic signs - Part 1: Fixed signs**

under system 1 for the performance set out in this certificate are applied and that the factory production control conducted by the manufacturer is assessed to ensure the

CONSTANCY OF PERFORMANCE OF THE CONSTRUCTION PRODUCT.

This certificate was first issued on 2018-03-07 and will remain valid as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body.

The attached annexes form part of this certificate.

Date of issue: **2024-04-26**

(This certificate supersedes the previous version of this certificate issued 2019-08-22)



Merete Poulsen
Responsible for evaluation



Lene Skovbjerg
Responsible for certification decision

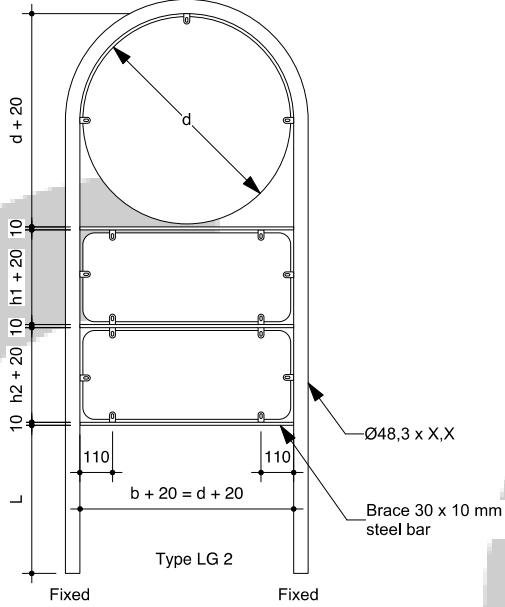
The certificate shall be reproduced in extenso
– extracts only with written permission from DBI Certification A/S.

Annex 1
EXTENT

Description and classification:

Sign, sizes and mounting system		Classification according to wind load classes																																																																																																								
Pipes: Minimum steel quality: S235 in dimension $\varnothing 33,7 \times 3,2$, $\varnothing 48,3 \times 2,9$, $\varnothing 48,3 \times 3,0$ and $\varnothing 48,3 \times 3,2$ mm Signboard: Minimum aluminium quality: $R_{p0,2} = 180$ MPa, min. 2 mm thickness		Placed in WL1	Placed in WL2	Placed in WL3																																																																																																						
<p>Type LG 1.1</p>		$h \leq 500$ mm, $b \leq 2500$ mm and $L \leq 500$ mm																																																																																																								
		PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB3, P2, E1 and SP1.																																																																																																						
<p>Type LG 1.2</p>		$h1 \leq 330$ mm, $b \leq 1750$ mm and $L \leq 500 + h2 + 30$ mm																																																																																																								
		PAF1, WL1, DSL0, PLO, TDB2, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB3, P2, E1 and SP1.																																																																																																						
<table border="1"> <thead> <tr> <th rowspan="2">b</th> <th rowspan="2">Numbers of braces</th> <th colspan="6">Measures for braces</th> </tr> <tr> <th>←</th> <th>←</th> <th>←</th> <th>←</th> <th>←</th> <th>←</th> </tr> </thead> <tbody> <tr> <td>1000</td> <td>2</td> <td>344</td> <td>332</td> <td>344</td> <td></td> <td></td> <td></td> </tr> <tr> <td>1250</td> <td>2</td> <td>426</td> <td>418</td> <td>426</td> <td></td> <td></td> <td></td> </tr> <tr> <td>1500</td> <td>2</td> <td>510</td> <td>500</td> <td>510</td> <td></td> <td></td> <td></td> </tr> <tr> <td>1750</td> <td>2</td> <td>593</td> <td>584</td> <td>593</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2000</td> <td>2</td> <td>677</td> <td>666</td> <td>677</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2250</td> <td>4</td> <td>460</td> <td>450</td> <td>450</td> <td>450</td> <td>460</td> <td></td> </tr> <tr> <td>2500</td> <td>4</td> <td>510</td> <td>500</td> <td>500</td> <td>500</td> <td>510</td> <td></td> </tr> <tr> <td>2750</td> <td>4</td> <td>560</td> <td>550</td> <td>550</td> <td>550</td> <td>560</td> <td></td> </tr> <tr> <td>3000</td> <td>5</td> <td>510</td> <td>500</td> <td>500</td> <td>500</td> <td>500</td> <td>510</td> </tr> <tr> <td>3250</td> <td>6</td> <td>475</td> <td>464</td> <td>464</td> <td>464</td> <td>464</td> <td>475</td> </tr> <tr> <td>3500</td> <td>6</td> <td>510</td> <td>500</td> <td>500</td> <td>500</td> <td>500</td> <td>510</td> </tr> </tbody> </table>		b	Numbers of braces	Measures for braces						←	←	←	←	←	←	1000	2	344	332	344				1250	2	426	418	426				1500	2	510	500	510				1750	2	593	584	593				2000	2	677	666	677				2250	4	460	450	450	450	460		2500	4	510	500	500	500	510		2750	4	560	550	550	550	560		3000	5	510	500	500	500	500	510	3250	6	475	464	464	464	464	475	3500	6	510	500	500	500	500	510	$h1 \leq 330$ mm, $h2 \leq 330$ mm, $b \leq 3000$ mm and $L \leq 500$ mm		
				b	Numbers of braces	Measures for braces																																																																																																				
←	←	←	←			←	←																																																																																																			
1000	2	344	332	344																																																																																																						
1250	2	426	418	426																																																																																																						
1500	2	510	500	510																																																																																																						
1750	2	593	584	593																																																																																																						
2000	2	677	666	677																																																																																																						
2250	4	460	450	450	450	460																																																																																																				
2500	4	510	500	500	500	510																																																																																																				
2750	4	560	550	550	550	560																																																																																																				
3000	5	510	500	500	500	500	510																																																																																																			
3250	6	475	464	464	464	464	475																																																																																																			
3500	6	510	500	500	500	500	510																																																																																																			
PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB3, P2, E1 and SP1.																																																																																																								
<table border="1"> <thead> <tr> <th rowspan="2">b</th> <th rowspan="2">Numbers of braces</th> <th colspan="6">Measures for braces</th> </tr> <tr> <th>←</th> <th>←</th> <th>←</th> <th>←</th> <th>←</th> <th>←</th> </tr> </thead> <tbody> <tr> <td>1000</td> <td>2</td> <td>344</td> <td>332</td> <td>344</td> <td></td> <td></td> <td></td> </tr> <tr> <td>1250</td> <td>2</td> <td>426</td> <td>418</td> <td>426</td> <td></td> <td></td> <td></td> </tr> <tr> <td>1500</td> <td>2</td> <td>510</td> <td>500</td> <td>510</td> <td></td> <td></td> <td></td> </tr> <tr> <td>1750</td> <td>2</td> <td>593</td> <td>584</td> <td>593</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2000</td> <td>2</td> <td>677</td> <td>666</td> <td>677</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2250</td> <td>4</td> <td>460</td> <td>450</td> <td>450</td> <td>450</td> <td>460</td> <td></td> </tr> <tr> <td>2500</td> <td>4</td> <td>510</td> <td>500</td> <td>500</td> <td>500</td> <td>510</td> <td></td> </tr> <tr> <td>2750</td> <td>4</td> <td>560</td> <td>550</td> <td>550</td> <td>550</td> <td>560</td> <td></td> </tr> <tr> <td>3000</td> <td>5</td> <td>510</td> <td>500</td> <td>500</td> <td>500</td> <td>500</td> <td>510</td> </tr> <tr> <td>3250</td> <td>6</td> <td>475</td> <td>464</td> <td>464</td> <td>464</td> <td>464</td> <td>475</td> </tr> <tr> <td>3500</td> <td>6</td> <td>510</td> <td>500</td> <td>500</td> <td>500</td> <td>500</td> <td>510</td> </tr> </tbody> </table>		b	Numbers of braces	Measures for braces						←	←	←	←	←	←	1000	2	344	332	344				1250	2	426	418	426				1500	2	510	500	510				1750	2	593	584	593				2000	2	677	666	677				2250	4	460	450	450	450	460		2500	4	510	500	500	500	510		2750	4	560	550	550	550	560		3000	5	510	500	500	500	500	510	3250	6	475	464	464	464	464	475	3500	6	510	500	500	500	500	510	$h1 \leq 330$ mm, $h2 \leq 330$ mm, $b \leq 3500$ mm and $L \leq 500$ mm		
				b	Numbers of braces	Measures for braces																																																																																																				
←	←	←	←			←	←																																																																																																			
1000	2	344	332	344																																																																																																						
1250	2	426	418	426																																																																																																						
1500	2	510	500	510																																																																																																						
1750	2	593	584	593																																																																																																						
2000	2	677	666	677																																																																																																						
2250	4	460	450	450	450	460																																																																																																				
2500	4	510	500	500	500	510																																																																																																				
2750	4	560	550	550	550	560																																																																																																				
3000	5	510	500	500	500	500	510																																																																																																			
3250	6	475	464	464	464	464	475																																																																																																			
3500	6	510	500	500	500	500	510																																																																																																			
PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB4, P2, E1 and SP1.	X																																																																																																								

The certificate shall be reproduced in extenso
 – extracts only with written permission from DBI Certification A/S.

<p align="center">Sign, sizes and mounting system</p> <p>Pipes: Minimum steel quality: S235 in dimension $\varnothing 33,7 \times 3,2$, $\varnothing 48,3 \times 2,9$, $\varnothing 48,3 \times 3,0$ and $\varnothing 48,3 \times 3,2$ mm Signboard: Minimum aluminium quality: $R_{p0,2} = 180$ MPa, min. 2 mm thickness</p>	<p align="center">Classification according to wind load classes</p>		
	Placed in WL1	Placed in WL2	Placed in WL3
	<p align="center">$d \leq 700$ mm and $L \leq h1 + h2 + 60 + 500$ mm</p>		
	PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB3, P2, E1 and SP1.
	<p align="center">$d \leq 700$ mm, $h1 \leq 300$ mm and $L \leq h2 + 30 + 500$ mm</p>		
	PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB3, P2, E1 and SP1.
	<p align="center">$d \leq 700$ mm, $h1 \leq 300$ mm, $h2 \leq 300$ mm and $L \leq 500$ mm</p>		
	PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB3, P2, E1 and SP1.

The certificate shall be reproduced in extenso
 – extracts only with written permission from DBI Certification A/S.

Sign, sizes and mounting system Pipes: Minimum steel quality: S235 in dimension $\varnothing 33,7 \times 3,2$, $\varnothing 48,3 \times 2,9$, $\varnothing 48,3 \times 3,0$ and $\varnothing 48,3 \times 3,2$ mm Signboard: Minimum aluminium quality: $R_{p0,2} = 180$ MPa, min. 2 mm thickness		Classification according to wind load classes		
		Placed in WL1	Placed in WL2	Placed in WL3
<p>h1 + 20</p> <p>h2 + 20</p> <p>h3 + 20</p> <p>L</p> <p>110</p> <p>b + 20</p> <p>110</p> <p>Fixed</p> <p>Fixed</p> <p>Type LG 3</p> <p>$\varnothing 48,3 \times X,X$</p> <p>Brace 30 x 10 mm steel bar</p>		$h1 \leq 700$ mm, $b \leq 700$ mm and $L \leq h2 + h3 + 60 + 500$ mm		
		PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB4, P2, E1 and SP1.
		$h1 \leq 700$ mm, $h2 \leq 300$ mm, $b \leq 700$ mm and $L \leq h3 + 30 + 500$ mm		
		PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB4, P2, E1 and SP1.
		$h1 \leq 700$ mm, $h2 \leq 300$ mm, $h3 \leq 300$ mm, $b \leq 700$ mm and $L \leq 500$ mm		
PAF1, WL1, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL2, DSL0, PLO, TDB3, P2, E1 and SP1.	PAF1, WL3, DSL0, PLO, TDB4, P2, E1 and SP1.		
Resistance to horizontal loads		NPD		
Resistance to bending		NPD		
Resistance to torsion		NPD		
Fixings:		Pass. M6 Screws, nuts and washers M6: $f_y \geq 320$ MPa Pressure force for tightening: 2 kN		
Temporary deflection (s supports) -bending -torsion		NPD		
Permanent deflection		NPD		
Performance under vehicle impact		NPD		
ORALITE® 5710 Engineering Grade: Retroreflective sheeting ORALITE® 5710 Engineering Grade with the following original dyed colours:				

The certificate shall be reproduced in extenso
 – extracts only with written permission from DBI Certification A/S.

Colour	Name of product	Visibility characteristics		Durability	
		Daylight Chromaticity & luminance factor 4.1.1.3. For black colours: 7.2.2.1.3	Coefficient of retroreflection 4.1.1.4	Impact resistance 4.1.2.	Resistance to weathering 4.1.1.5. For black colours: 7.2.2.1.4
White	ORALITE® 5710-010 Engineering Grade	CR2	RA1	pass	pass
Yellow	ORALITE® 5710-020 Engineering Grade	CR2	RA1	pass	pass
Red	ORALITE® 5710-030 Engineering Grade	CR2	RA1	pass	pass
Blue	ORALITE® 5710-050 Engineering Grade	CR2	RA1	pass	pass
Green	ORALITE® 5710-060 Engineering Grade	CR2	RA1	pass	pass
Orange	ORALITE® 5710-035 Engineering Grade	CR1	RA1	pass	pass
Brown	ORALITE® 5710-080 Engineering Grade	CR2	RA1	pass	pass
Retroreflective sheeting ORALITE® 5710 engineering Grade with the following Lettering Film:					
Black	ORALITE® 5071-070 Lettering Film	NR1	-	pass	pass
Retroreflective sheeting ORALITE® 5710 engineering Grade with the following screen printing colours on white retroreflective sheeting:					
Yellow	ORALITE® 5018-020 Screen Printing ink	CR2	RA1	pass	pass
Red	ORALITE® 5018-030 Screen Printing ink	CR2	RA1	pass	pass
blue	ORALITE® 5018-050 Screen Printing ink	CR2	RA1	pass	pass
Green	ORALITE® 5018-060 Screen Printing ink	CR2	RA1	pass	pass
Black	ORALITE® 5018-070 Screen Printing ink	NR1	-	pass	pass
Retroreflective sheeting ORALITE® 5710 engineering Grade with the following screen printing colours on yellow retroreflective sheeting:					
Red	ORALITE® 5018-030 Screen Printing ink	CR2	RA1	pass	pass
Black	ORALITE® 5018-070 Screen Printing ink	NR1	-	pass	pass
Digital printing colours: The digital printing is processed on white retroreflective sheeting with the digital printing system AGFA ANAPURNA M2050 High-Speed-UV-Inkjet-System and is to be laminated with the transparent laminate ORALITE® 5062-000 Transparent Film.					
Digital Printing Colour ORALITE® 5019 UV Digital Printing Ink					

The certificate shall be reproduced in extenso
 – extracts only with written permission from DBI Certification A/S.



On white sheeting	ORALITE® 5710-010 Engineering Grade and				
White	ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Yellow	ORALITE® 5019-020 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Red	ORALITE® 5019-030 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Blue	ORALITE® 5019-050 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Green	ORALITE® 5019-060 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Grey	ORALITE® 5019-625 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Black	ORALITE® 5019-070 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	NR1	-	pass	pass
If the colour black is printed solely, this material combination is admitted to be used without the transparent laminate.					
Black	ORALITE® 5019-070 UV Digital Printing Ink	NR1	-	pass	pass
Digital printing colour ORALITE® 5019i UV Digital Printing Ink					
On white sheeting	ORALITE® 5710-010 Engineering Grade and				
White	ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Yellow	ORALITE® 5019i-020 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Red	ORALITE® 5019i-030 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Blue	ORALITE® 5019i-050 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Green	ORALITE® 5019i-060 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Orange	ORALITE® 5019i-035 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR1	RA1	pass	pass
Brown	ORALITE® 5019i-080 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	CR2	RA1	pass	pass
Black	ORALITE® 5019i-070 UV Digital Printing Ink and ORALITE® 5062-000 Transparent Film	NR1	-	pass	pass
Clear protective overlay film:					
Clear protective overlay films (Anti-Graffiti) are always admitted in combination with retroreflective sheeting and a colouring process					
Anti-Graffiti:					
The original dyed retroreflective sheeting with the screen-printing ORALITE® 5018 is accepted to be laminated with the clear protective overlay film ORALITE® 5095 Anti-Graffiti Film for the following colours:					
Original dyed retroreflective sheeting ORALITE® 5710 Engineering Grade with screen-printing ORALITE® 5018					
Red	ORALITE® 5018-030 Screen Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA1	pass	pass
Blue	ORALITE® 5018-050 Screen Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA1	pass	pass
Black	ORALITE® 5018-070 Screen Printing Ink and ORALITE® 5095 Anti-Graffiti Film	NR1	-	pass	pass
ORALITE® 5810 High Intensity Grade:					
Retroreflective sheeting ORALITE® 5810 High Intensity Grade with the following original dyed colours:					
Colour	Name of product	Visibility characteristics		Durability	
		Daylight Chromaticity & luminance factor 4.1.1.3.	Coefficient of retroreflection 4.1.1.4	Impact resistance 4.1.2.	Resistance to weathering 4.1.1.5.

The certificate shall be reproduced in extenso
 – extracts only with written permission from DBI Certification A/S.



		For black colours: 7.2.2.1.3			For black colours: 7.2.2.1.4
White	ORALITE® 5810-010 High Intensity Grade	CR2	RA2	pass	pass
Yellow	ORALITE® 5810-020 High Intensity Grade	CR2	RA2	pass	pass
Red	ORALITE® 5810-030 High Intensity Grade	CR2	RA2	pass	pass
Blue	ORALITE® 5810-050 High Intensity Grade	CR2	RA2	pass	pass
Green	ORALITE® 5810-060 High Intensity Grade	CR2	RA2	pass	pass
Brown	ORALITE® 5810-080 High Intensity Grade	CR2	RA2	pass	pass
Retroreflective sheeting ORALITE® 5810 High Intensity Grade with the following Lettering Film:					
Black	ORALITE® 5081-070 Lettering Film	NR1	-	pass	pass
Retroreflective sheeting ORALITE® 5810 High Intensity Grade with the following Coloured Laminates:					
Yellow	ORALITE® 5061-020 Transparent Film	CR2	RA2	pass	pass
Red	ORALITE® 5061-030 Transparent Film	CR2	RA2	pass	pass
Blue	ORALITE® 5061-050 Transparent Film	CR2	RA2	pass	pass
Green	ORALITE® 5061-060 Transparent Film	CR2	RA2	pass	pass
Brown	ORALITE® 5061-080 Transparent Film	CR2	RA2	pass	pass
Dark Green	ORALITE® 5061-625 Transparent Film	CR1	RA2	pass	pass
Retroreflective sheeting ORALITE® 5810 High Intensity Grade with the following Screen Printing Colours on white retroreflective sheeting:					
Yellow	ORALITE® 5018-020 Screen Printing Ink	CR2	RA2	pass	pass
Red	ORALITE® 5018-030 Screen Printing Ink	CR2	RA2	pass	pass
Blue	ORALITE® 5018-050 Screen Printing Ink	CR2	RA2	pass	pass
Green	ORALITE® 5018-060 Screen Printing Ink	CR2	RA2	pass	pass
Black	ORALITE® 5018-070 Screen Printing Ink	NR1	-	pass	pass
Retroreflective sheeting ORALITE® 5810 High Intensity Grade with the following Screen Printing Colours on yellow retroreflective sheeting:					
Red	ORALITE® 5018-030 Screen Printing Ink	CR2	RA1	pass	pass
Black	ORALITE® 5018-070 Screen Printing Ink	NR1	-	pass	pass
Digital Printing Colours:					
Digital Printing Colour ORALITE® 5019 UV Digital Printing Ink					
The digital printing is processed on white retroreflective sheeting with the digital printing system AGFA ANAPURNA M2050 High-Speed-UV-Inkjet-System and is to be laminated with a transparent laminate.					
Digital Printing with protective laminate ORALITE® 5061-000 Transparent Film					
On white sheeting	ORALITE® 5810-010 High Intensity Grade and				
WBwhite	ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Yellow	ORALITE® 5019-020 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass

The certificate shall be reproduced in extenso
 – extracts only with written permission from DBI Certification A/S.

Red	ORALITE® 5019-030 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Blue	ORALITE® 5019-050 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Green	ORALITE® 5019-060 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Brown	ORALITE® 5019-080 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Dark Green	ORALITE® 5019-625 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Grey	ORALITE® 5019-073 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2*	pass	pass
*Coefficient of retroreflection: Value for printed colours 70% of RA2					
Black	ORALITE® 5019-070 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	NR1	-	pass	pass
Digital Printing with protective laminate ORALITE® 5090 Anti-Dew Film:					
On white sheeting	ORALITE® 5810-010 High Intensity Grade and				
White	ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
Yellow	ORALITE® 5019-020 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
Red	ORALITE® 5019-030 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
Blue	ORALITE® 5019-050 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2*	pass	pass
Green	ORALITE® 5019-060 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2*	pass	pass
Brown	ORALITE® 5019-080 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
Dark Green	ORALITE® 5019-625 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
Grey	ORALITE® 5019-073 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	CR2	RA2	pass	pass
*Coefficient of retroreflection: Value for printed colours 70% of RA2					
Black	ORALITE® 5019-070 UV Digital Printing Ink and ORALITE® 5090 Anti-Dew Film	NR1	-	pass	pass
Digital Printing with protective laminate ORALITE® 5095 Anti-Graffiti Film:					
On white sheeting	ORALITE® 5810-010 High Intensity Grade and				
White	ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Yellow	ORALITE® 5019-020 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Red	ORALITE® 5019-030 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Blue	ORALITE® 5019-050 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2*	pass	pass
Green	ORALITE® 5019-060 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2*	pass	pass

The certificate shall be reproduced in extenso
 – extracts only with written permission from DBI Certification A/S.

Brown	ORALITE® 5019-080 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Grey	ORALITE® 5019-073 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
*Coefficient of retrorefelction: Value for printed colours 70% of RA2					
Black	ORALITE® 5019-070 UV Digital Printing Ink and ORALITE® 5095 Anti-Graffiti Film	NR1	-	pass	pass
If the colour Black is printed solely, this material combination is admitted to be used without the transparent laminate					
Black	ORALITE® 5019-070 UV Digital Printing Ink	NR1	-	pass	pass
Digital Printing Colour ORALITE® 5019i UV Digital Printing Ink: The digital printing is processed on white retro reflective sheeting with the digital printing system AGFA ANAPURNA M2050 High-Speed-UV-Inkjet-System and is to be laminated with the transparent laminate ORALITE® 5061-000 Transparent Film					
On white sheeting and	ORALITE® 5810-010 High Intensity Grade				
White	ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Yellow	ORALITE® 5019i-020 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Red	ORALITE® 5019i-030 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Blue	ORALITE® 5019i-050 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Green	ORALITE® 5019i-060 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Brown	ORALITE® 5019i-080 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Dark Green	ORALITE® 5019i-625 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Grey	ORALITE® 5019i-073 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	CR2	RA2	pass	pass
Black	ORALITE® 5019i-070 UV Digital Printing Ink and ORALITE® 5061-000 Transparent Film	NR1	-	pass	pass
Clear overlay film with special function: Clear overlay films with special function (anti-dew and anti-graffiti) are always admitted in combination with a dyed sheeting and a colouring process.					
Anti Dew: The dyed sheeting and the combination with coloured laminates is accepted to be processed with the clear overlay film anti-dew function ORALITE® 5090 Anti-Dew film for the following colours:					
Dyed Retroreflective Sheeting:					
White	ORALITE® 5810-010 High Intensity Grade and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Yellow	ORALITE® 5810-020 High Intensity Grade and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Red	ORALITE® 5810-030 High Intensity Grade and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Blue	ORALITE® 5810-050 High Intensity Grade	CR2	RA2	pass	pass

The certificate shall be reproduced in extenso
 – extracts only with written permission from DBI Certification A/S.

	and ORALITE® 5090 Anti-Dew film				
Dyed Retroreflective Sheeting ORALITE® 5810 High Intensity Grade with Coloured Laminate:					
Yellow	ORALITE® 5061-020 Transparent Film and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Red	ORALITE® 5061-030 Transparent Film and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Blue	ORALITE® 5061-050 Transparent Film and ORALITE® 5090 Anti-Dew film	CR2	RA2	pass	pass
Dyed Retroreflective Sheeting ORALITE® 5810 High Intensity Grade with Lettering film:					
Black	ORALITE® 5081-070 Lettering Film and ORALITE® 5090 Anti-Dew film	NR1	-	pass	pass
Anti-Graffiti: The dyed sheeting and the combination with coloured laminates is accepted to be processed with the clear overlay film with an anti-graffiti function ORALITE® 5095 Anti Graffiti Film for the following colours.					
Dyed Retroreflective Sheeting:					
White	ORALITE® 5810-010 High Intensity Grade and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Yellow	ORALITE® 5810-020 High Intensity Grade and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Red	ORALITE® 5810-030 High Intensity Grade and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Blue	ORALITE® 5810-050 High Intensity Grade and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Dyed Retroreflective Sheeting ORALITE® 5810 High Intensity Grade with Coloured Laminate:					
Yellow	ORALITE® 5061-020 Transparent Film and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Red	ORALITE® 5061-030 Transparent Film and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Blue	ORALITE® 5061-050 Transparent Film and ORALITE® 5095 Anti-Graffiti Film	CR2	RA2	pass	pass
Dyed Retroreflective Sheeting ORALITE® 5810 High Intensity Grade with Lettering Film:					
Black	ORALITE® 5081-070 Lettering Film and ORALITE® 5095 Anti-Graffiti Film	NR1	-	pass	pass
External illumination:					
mean illuminance,				NPD	
uniformity of illuminance				NPD	
Corrosion resistance					
Steel pipes and fins				Minimum S235 SP1 The pipe and fins are after manufacturing hot dip galvanized to a minimum of 60µm	
Screws, nuts and washers				M6: fy ≥ 320 MPa Stainless steel SP2 or anodized aluminum SP1	

The certificate shall be reproduced in extenso
 – extracts only with written permission from DBI Certification A/S.

Aluminium plate		Minimum Rp0,2 \geq 180 MPa SP1 Lacquered Al-plate on exposed side if any
Resistance to penetration of dust and water		NPD The product cannot be provided with compartments for electrical equipment



The certificate shall be reproduced in extenso
 – extracts only with written permission from DBI Certification A/S.

Annex 2

TECHNICAL BASIS

Title	Date
Infra Group danmark ApS Calculation of minor traffic signs (ITC) Shapes and sizes for signs mounted in gallows type LG Revision 02	March 2018
Retroreflective Sheetings 5710 Engineering grade: 0913-CPD-2009/001 Annex	2009-03-17 2018-02-23
Retroreflective Sheeting Oralite 5810 High Intensity grade: 0913-CPD-2009/035 Annex	2012-06-27 2018-02-23
Addendum to Calculation of minor traffic signs (ITC) Shapes and Sizes for Signs Mounted in gallows Type LG 1 st . edition	December 2017

The certificate shall be reproduced in extenso
 – extracts only with written permission from DBI Certification A/S.